


Design Span®hp

Featuring


Zincalume® For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

Design Span®hp is a performance-rated structural standing seam metal roof system with net coverage of 12", 17" up to 24". Design Span®hp is excellent as a roof over metal or wood decking, and as a fascia or mansard over plywood or supports.

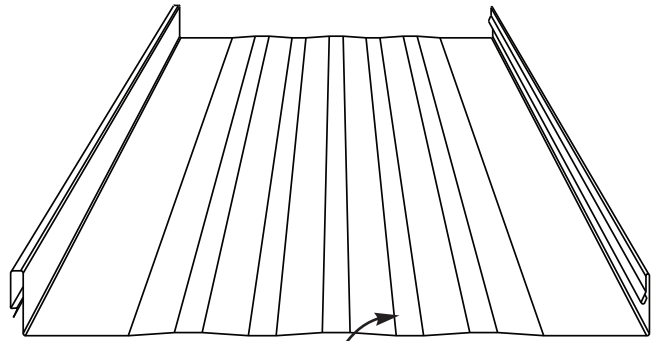

Available with subtle striations for a clean pan (17", 18", and 24" widths)

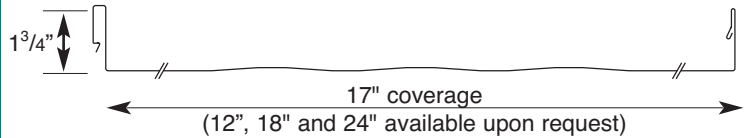

features | benefits

- Subtle striations between ribs on 17" and wider panels reduce the appearance of oil-canning.
- Available in a wide variety of standard colors in the DuraTech™5000 (polyvinylidene flouride) coating system, and the ZACtique®II treatment.
- Tested in accordance with UL580 & ASTM E1592.
- Meets UL 90 wind uplift requirement for 12", 17" and 18" wide panels.
- Has been tested for air infiltration per ASTM E1680, and water infiltration per ASTM E1646.
- Can be installed over solid substrates or spaced support members at spans to 4'-0".
- Available with a 1 1/8" notch at both ends of each panel for the ease of turning under; reducing installation labor and costs (see back for illustration).
- Factory applied butyl sealant is standard.
- Snap-together panel, no field seaming required.

Design Span®hp Section Properties					
Design Span® hp-12"					
Gauge	Wt. (lbs./ft.²)	S+ (in.³/ft.)	I+ (in.⁴/ft.)	S- (in.³/ft.)	I- (in.⁴/ft.)
24	1.39	0.0822	0.1178	0.0648	0.0595
22	1.78	0.1046	0.1502	0.0932	0.0834
Design Span® hp-17" and 18"					
Gauge	Wt. (lbs./ft.²)	S+ (in.³/ft.)	I+ (in.⁴/ft.)	S- (in.³/ft.)	I- (in.⁴/ft.)
24	1.24	0.0566	0.0859	0.0434	0.0399
22	1.58	0.0721	0.1096	0.0625	0.0559
Design Span® hp-24"					
Gauge	Wt. (lbs./ft.²)	S+ (in.³/ft.)	I+ (in.⁴/ft.)	S- (in.³/ft.)	I- (in.⁴/ft.)
24	1.17	0.045	0.0678	0.0326	0.03
22	1.49	0.0552	0.0866	0.047	0.0421



www.aepspan.com

Tacoma, WA 800-733-4933, 253-383-4955 FAX 253-272-0791
 Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394
 Kernersville, NC 800-527-2503, 214-827-1740 FAX 214-828-1394