

# HR-36™ Roof & Wall


Commercial and Industrial Application  
26 & 29 Gauge

Featuring


**Zincalume® For Twice the Life!**

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

HR-36™ Roof & Wall is a through-fastened metal panel with 36" net coverage. HR-36 Roof & Wall is predominantly used in industrial and light commercial applications.

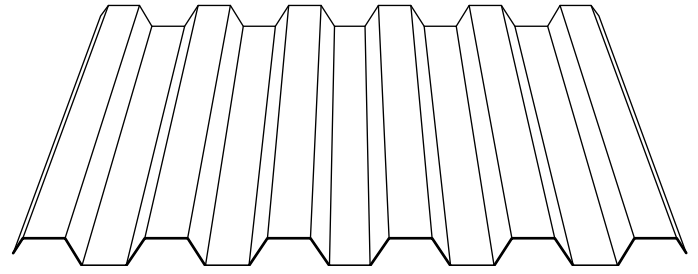

HR-36 Roof & Wall (Typical Roof Application)

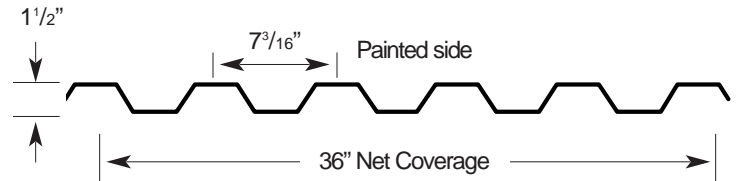

## features | benefits

- Wider coverage means fewer panels to handle and install, saving time and money.
- Long spanning capability; design provides superior load and span capacities, saving money in structural support.
- Quick, economical trim packages available as standard trim pieces that can be ordered by number.
- High tensile steel panels in 26 gauge available with the DuraTech<sup>®</sup>nt coating or unpainted Zincalume<sup>®</sup> Plus.
- Exceptional value in high tensile steel 29 gauge panels coated with the ColorGuard<sup>™</sup>xt coating system. Choose from Surf White, Desert Beige, Lightstone or Zincalume<sup>®</sup> Plus for unpainted applications.
- Fiberglass panels are available in matching profile.

HR-36 Roof & Wall Section Properties

Gauge	Wt. (lbs/ft <sup>2</sup> )	S+ (in <sup>3</sup> /ft)	I+ (in <sup>4</sup> /ft)	S- (in <sup>3</sup> /ft)	I- (in <sup>4</sup> /ft)
29	0.74	0.0618	0.0576	0.0549	0.0589
26	0.98	0.0895	0.0825	0.0839	0.0838

[www.aepspan.com](http://www.aepspan.com)



Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791  
Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625  
Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394  
Kernersville, NC 800-527-2503, 214-827-1740 FAX 214-828-1394