

HR-36™ Roof & Wall


18-24 Gauge Architectural Panels

Featuring


Zincalume® For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of zinc coatings.

HR-36™ Roof & Wall is a through-fastened metal panel with 36" net coverage. HR-36™ Roof & Wall is predominantly used in industrial and commercial applications.

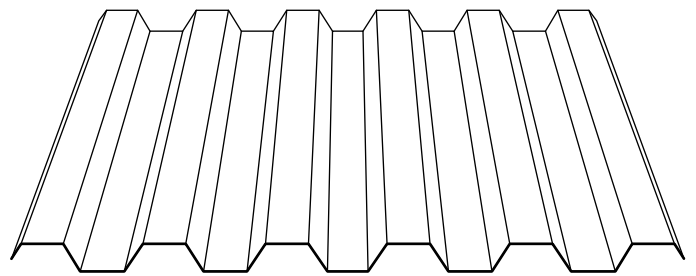

HR-36 Roof & Wall (Typical Roof Application)

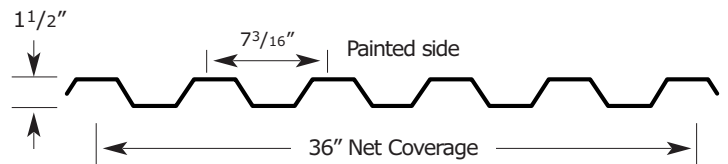

features | benefits

- Wider coverage means fewer panels to handle and install, saving time and money.
- Long spanning capability: design provides superior load and span capacities, saving money in structural support.
- Quick, standard economical trim packages available and can be ordered by number.
- Crimp curving available for a unique appearance.
- Fiberglass panels are available to match the profile of the metal panels.

- 24 gauge through 18 gauge panels available with "DuraTech®5000 (polyvinylidene fluoride) coating system, ZACTique®II treatment or Zincalume® Plus*." 18, 20 and 22 gauge panels require longer lead times.

HR-36 Roof & Wall Section Properties					
Gauge	Wt. (lbs/ft ²)	S+ (in ³ /ft)	I+ (in ⁴ /ft)	S- (in ³ /ft)	I- (in ⁴ /ft)
24	1.20	.1234	.1116	.1156	.1141
22	1.53	.1711	.1504	.1601	.1544
20*	1.85	.2229	.1907	.2085	.1964
18*	2.46	.3264	.2633	.3055	.2721

*18 and 20 gauge are supplied as G-90 galvanized.



Engineered Solutions in Metal

Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791
 Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625
 Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394
 Kernersville, TX 800-527-2503, 214-827-1740 FAX 214-828-1394

www.aepspan.com