

Reversed HR-36™ Wall

18-24 Gauge Architectural Panels


Featuring

Zincalume® For Twice the Life!


Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

Reversed HR-36™ Wall is a through-fastened metal panel with 36" net coverage. Reversed HR-36™ is predominantly used in industrial and commercial wall applications.

- ❑ Wider coverage means fewer panels to handle and install, saving time and money.
- ❑ Long spanning capability: design provides superior load and span capacities, reducing in structural support, requirements.
- ❑ Quick, standard economical trim packages available and can be ordered by number.
- ❑ Crimp curving available for a unique appearance.
- ❑ 24 gauge through 18 gauge panels available with DuraTech™5000 (polyvinylidene fluoride) coating system, ZACTique®II treatment or Zincalume® Plus*. 18, 20 and 22 gauge panels require longer lead times.
- ❑ Fiberglass panels are available in matching profile.

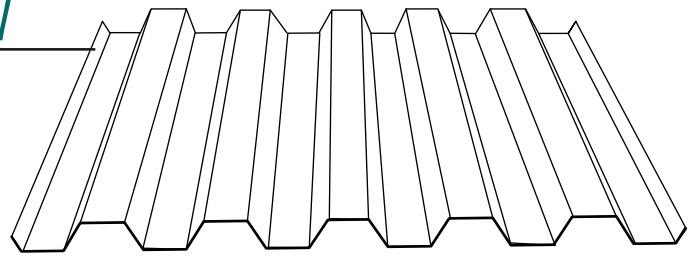

Reversed HR-36 Wall (typical wall applications)

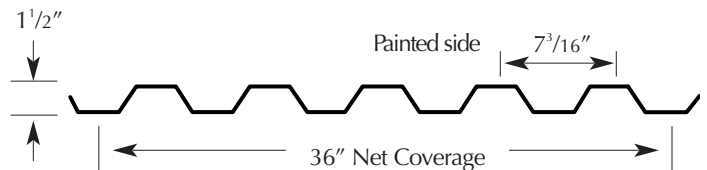

Reversed HR-36 Wall Section Properties					
Gauge	Wt. (lbs/ft ²)	S+ (in ³ /ft)	I+ (in ⁴ /ft)	S- (in ³ /ft)	I- (in ⁴ /ft)
24	1.20	0.1156	0.1141	0.1234	0.1116
22	1.53	0.1601	0.1544	0.1711	0.1504
20*	1.85	0.2085	0.1964	0.2229	0.1907
18*	2.46	0.3055	0.2721	0.3264	0.2633

*18 and 20 gauge are supplied as G-90 galvanized.

www.aepspan.com



Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791
 Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625
 Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394