


# Curved Select Seam®


Featuring

**Zincalume® For Twice the Life!**

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

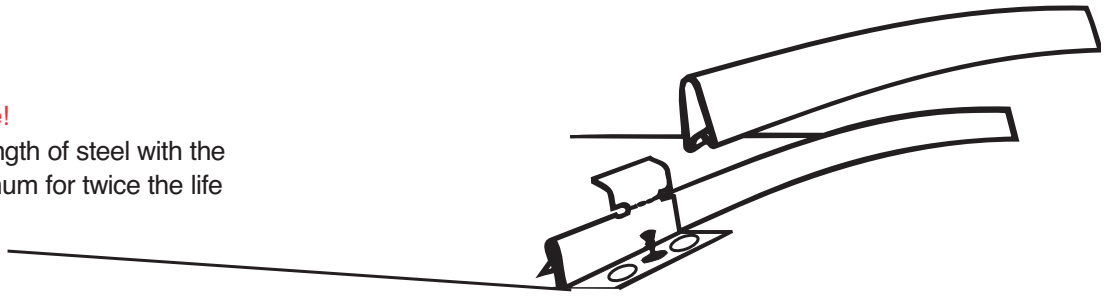

**Curved Select Seam** is a performance-rated, non-structural, batten seam metal roof system that can be curved for radius applications.



Narrow Batten

## features | benefits

- Available in narrow batten in the following net coverages:

Narrow Batten:      16" coverage  
                                 21 1/4" coverage

- Curving Options:

- Convex Curves: Narrow Batten 24 ga. can be machine curved on the field to a minimum 4' radius.
- Concave Curves: Narrow Batten 24 ga. can be machined curved on the field to a minimum 25' radius.

- Offered in a range of finishes including:

- 24 gauge Zincalume® with the DuraTech™5000 (polyvinylidene fluoride) coating system.
- Unpainted Zincalume® Plus.
- Real 16 oz. copper.
- ZACTique®II treatment

- Panels offered with subtle striations for a clean pan appearance.
- Zincalume® coated steel clips. Stainless steel clips are used with copper panels.
- Special underlayment is required on curved applications at areas with less than 3:12 slope.

*NOTE: Factory applied sealant currently not available for Curved Select Seam Narrow Batten. Sealant is field applied by installer.*

	Weight, lbs/Sq. ft.	
	24 ga.	22 ga.
16" Coverage	1.17	1.46
21 1/4" Coverage	1.11	1.39



Zincalume® is a registered trademark of Bluescope Limited.  
© Copyright ASC Profiles Inc. October 2006 Printed in USA  
Revision 5M (PS138)