


Super-Span®

Featuring

Zincalume® for Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of zinc coatings.

Super-Span® is an economical, structural, through-fastened roof or wall panel suitable for all-around general usage.

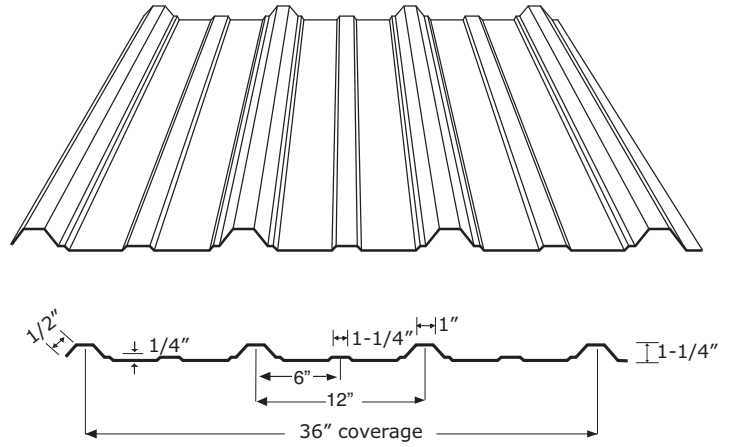

features | benefits

- Super-Span® has been tested in accordance with UL-580 and meets UL Class 90 wind uplift test requirements.
- Structural spanning allows panel to be installed over solid substrates or spaced support members.
- Full-bearing sidelap rib provide's consistent weather-resistant joint.
- Provides traditional metal roof or wall appearance with 1-1/4" high trapezoidal major ribs at 12" on center with one minor rib between each major rib.
- Tested for air infiltration per ASTM E-1680, and water infiltration per ASTM E-1646 (with field-applied side-lap sealant).
- Manufactured with high tensile steel for greater load capability.
- Matching trim packages are available in the same gauge and color as the roof panel.
- Fiberglass skylight panels are available in the matching profile.
- Can be installed on pitches as low as 1:12 with field applied mastic.
- Can be crimp curved to accommodate radiused applications.
- 26 gauge Super-Span® available in a wide variety of standard "Cool" colors with the DuraTech®nt coating system

Super-Span Section Properties					
Gauge	Wt. (lbs./ft ²)	S+ (in ³ /ft)	I+ (in ² /ft.)	S- (in ³ /ft.)	I- (in ⁴ /ft.)
26	0.90	.0461	.0475	.0712	.0384
24	1.16	.0667	.0656	.1058	.0540



Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791
 Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625
 Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394
 Kernersville, NC 800-527-2503, 214-827-1740 FAX 214-828-1394