


Span-Lok™, Span-Lok™ hp & SpanSeam

Featuring Zincalume® For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

Span-Lok™, Span-Lok™ hp and SpanSeam™ are performance-rated architectural standing seam metal roof systems. The mechanically seamed 2" and *3" high rib, provides aesthetic appeal and weather tightness that can be used in a wide variety of new construction or retrofit applications.

- ❑ Tested in accordance with UL580 and ASTM E1592.
- ❑ Meets UL 90 wind uplift requirements (purlin not to exceed 5'-0" o.c.).
- ❑ Span-Lok *hp* has an additional bend on the female rib which increases its uplift performance.
- ❑ Can be installed on pitches as low as 1/4":12"
- ❑ Has been tested for air infiltration per ASTM E1680, and water infiltration per ASTM E1646.
- ❑ 2" Span-Lok available machine curved (factory or field) for radiused applications.
- ❑ Can be installed over spaced supports or solid substrates.
- ❑ Factory applied sealant is standard (except curved panels).
- ❑ Factory swedged end laps available. Multiple course applications require staggered end laps.
- ❑ Factory notching available for turn under at the eave. Notch provides a clean detail and reduction in labor (left to right installation required).

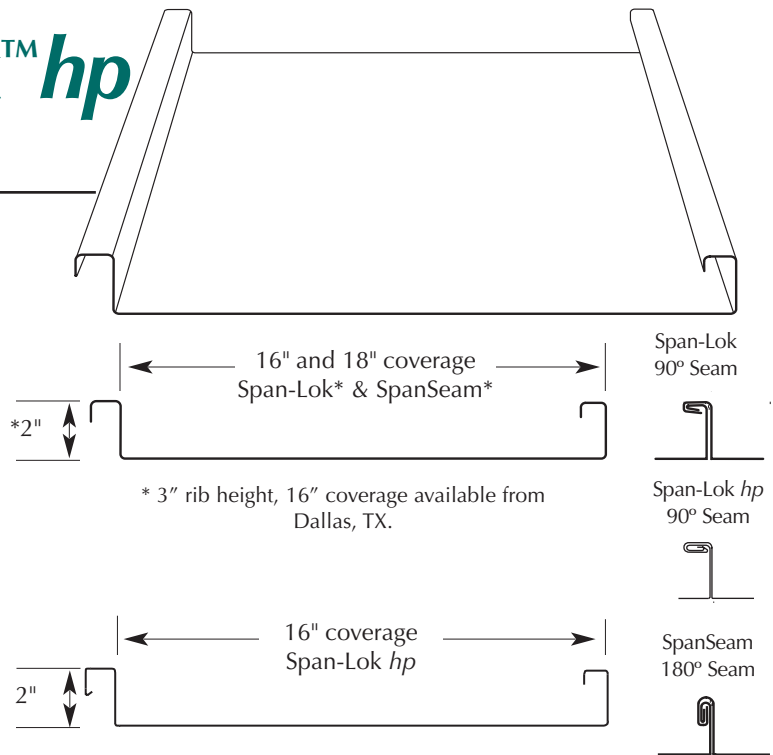

2" Span-Lok & SpanSeam Section Properties					
Span-Lok & SpanSeam 16"					
Gauge	Wt. (lbs./ft. ²)	S+ (in. ³ /ft.)	I+ (in. ⁴ /ft.)	S- (in. ³ /ft.)	I- (in. ⁴ /ft.)
24	1.28	0.0633	0.0855	0.0392	0.0330
22	1.62	0.0821	0.1103	0.0555	0.0458
Span-Lok & SpanSeam 18"					
Gauge	Wt. (lbs./ft. ²)	S+ (in. ³ /ft.)	I+ (in. ⁴ /ft.)	S- (in. ³ /ft.)	I- (in. ⁴ /ft.)
24	1.24	0.0579	0.0793	0.0386	0.0313
22	1.57	0.0749	0.1020	0.0522	0.0447
Span-Lok <i>hp</i> 16"					
Gauge	Wt. (lbs./ft. ²)	S+ (in. ³ /ft.)	I+ (in. ⁴ /ft.)	S- (in. ³ /ft.)	I- (in. ⁴ /ft.)
24	1.28	0.0633	0.0855	0.0392	0.0330
22	1.62	0.0821	0.1103	0.0555	0.0458

Note: 3" rib section properties available upon request.

- ❑ Two piece, self centering clips, allow for expansion and contraction of panels. Pre-caulked clips are available.
- ❑ Choose from subtle striations, two pencil ribs or a clean flat-pan between ribs depending on aesthetic requirements.
- ❑ Available in the DuraTech®5000 coating system, aluminum or copper.



www.aepspan.com

Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791
 Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625
 Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394