


Nor-Clad® x/ Allowable Load (psf)									
Gauge	Span	Condition	Span (ft. - in.)						
			2-0	2-6	3-0	3-6	4-0	4-6	5-0
29	SS	f	84	54	37	27	21	16	13
		L/120	84	54	34	21	14	10	7
	DS	f	85	54	37	27	21	16	13
		L/120	85	54	37	27	21	16	13
	TS	f	106	68	47	34	26	21	17
		L/120	106	68	47	34	26	19	13
26*	SS	f	123	79	54	40	30	24	19
		L/120	123	79	48	30	20	14	10
	DS	f	117	74	52	38	29	23	18
		L/120	117	74	52	38	29	23	18
	TS	f	146	93	65	47	36	28	23
		L/120	146	93	65	47	36	27	19

Loading Table Legend

f-Load limited by flexural bending stress
 L-Span (Inches)
 L/xxx-Load limited by deflection

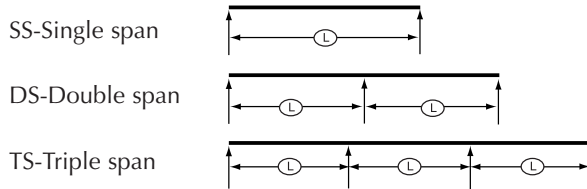

Notes:

- Top values based on allowable stress. Bottom values based on allowable deflection of L/120.
- Steel conforms to ASTM A-792 (Zincalume®), 80,000 psi minimum yield.
- Tables are for positive loading only.
- Values are based on the American Iron and Steel Institute (AISI) *Cold-Formed Steel Design Manual* (1996 Edition).

Specifications subject to change without notice.

* 26 gauge available in Sacramento and Anchorage.

Nor-Clad® x/ Section Properties

Gauge	Wt. (lbs/ft²)	S+ (in³/ft)	I+ (in⁴/ft)	S- (in³/ft)	I- (in⁴/ft)
29	0.61	0.0141	0.0070	0.0142	0.0053
26*	0.84	0.0206	0.0100	0.0195	0.0077

DuraTech™ x/ Color Retention Comparison

