



Delta Rib III

Featuring
Zincalume® For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of zinc coatings.

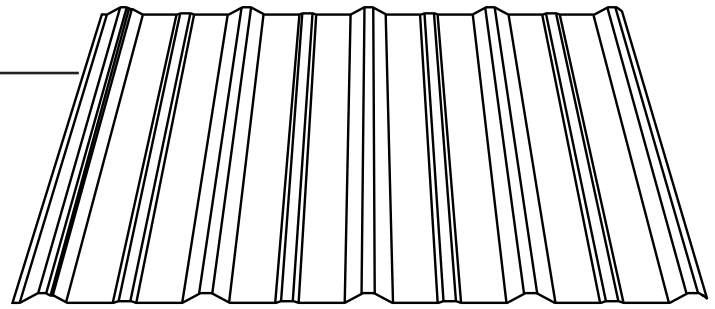

Delta Rib III is a light gauge, exposed fastener panel with 36" coverage used in residential roof or agricultural roof and wall applications.

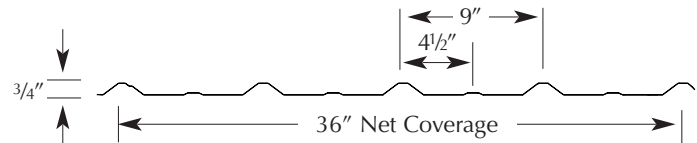

- ❑ 36" width coverage means fewer panels to handle and install, saving time and money.
- ❑ Purlin-bearing leg speeds installation of panels and improves the quality of panel side laps.
- ❑ Quick, economical trim packages available with standard trim pieces saving fabrication and installation time and money.
- ❑ Fiberglass skylight panels are available to match the profile of the metal panels.
- ❑ Manufactured with high tensile steel for greater load capability.
- ❑ Available in a wide variety of attractive colors or bare Zincalume®Plus for unpainted applications.
- ❑ Delta Rib III-25 offered in nine of our most popular colors coated with the ColorGuard 25™ protection system for exceptional value as well as bare galvanized for unpainted applications.



Delta Rib III and the DuraTech™ x/ - Zincalume® Coating System

Depend on superior color retention and corrosion resistance with DuraTech™ x/. The tested and proven technology promises a lifetime of durability.



Delta Rib III-25 with the ColorGuard 25™ Coating System

When seeking value and performance, ask for Delta Rib III-25. The ColorGuard 25 coating technology integrates galvanized protection with a high performance coating that ensures at least 25 years of good looks.

Delta Rib III Section Properties					
Gauge	Wt. (lbs/ft²)	S+ (in³/ft)	I+ (in⁴/ft)	S- (in³/ft)	I- (in⁴/ft)
29	0.62	0.0174	0.0103	0.0179	0.0077
26	0.85	0.0264	0.0157	0.0252	0.0117

