
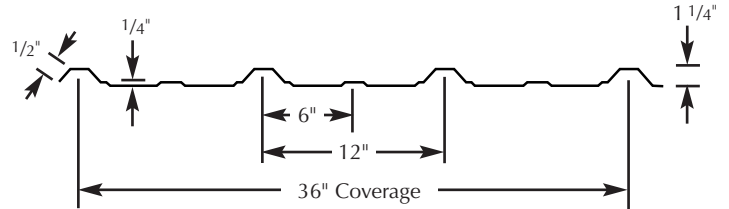


# Super-Span®

Featuring  
**Zincalume® For Twice the Life!**

Zincalume® combines the strength of steel with the corrosion resistance of aluminum for twice the life of zinc coatings.

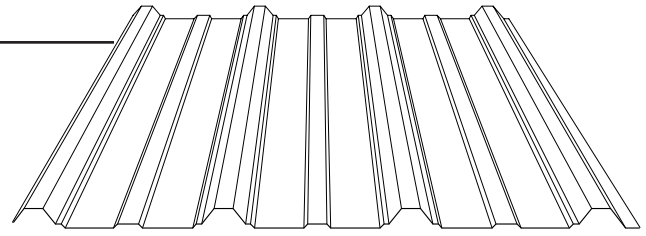

**Super-Span® is an economical, structural, through-fastened roof or wall panel suitable for all-around general usage.**

- ❑ Super-Span® has been tested in accordance with UL580 and meets UL Class 90 wind uplift test requirements.
- ❑ Structural spanning allows panel to be installed over solid substrates or spaced support members.
- ❑ Full-bearing sidelap rib provides consistent weather-resistant joint.
- ❑ Provides traditional metal roof or wall appearance with 1 1/4" high trapezoidal major ribs at 12" on center with one minor rib between each major rib.
- ❑ Tested for air infiltration per ASTM E1680, and water infiltration per ASTM E1646 (with field-applied side-lap sealant).
- ❑ Manufactured with high tensile steel for greater load capability.
- ❑ Matching trim packages are available in the same gauge and color as the roof panel.

**Super-Span® Section Properties**

Gauge	Wt. (lbs/ft <sup>2</sup> )	S+ (in <sup>3</sup> /ft)	I+ (in <sup>4</sup> /ft)	S- (in <sup>3</sup> /ft)	I- (in <sup>4</sup> /ft)
26	0.90	0.0461	0.0475	0.0712	0.0384
24	1.16	0.0667	0.0656	0.1058	0.0540

- ❑ Fiberglass skylight panels are available in the matching profile.
- ❑ Can be installed on pitches as low as 1:12 with field applied mastic.
- ❑ Can be crimp curved to accommodate radiused applications.
- ❑ 26 gauge Super-Span® available in a wide variety of standard colors with the DuraTech™*nt* coating system.



**Anchorage, AK** 800-478-2727, 907-349-2727, FAX 907-344-7095  
**Sacramento, CA / Salem, OR** 800-272-7023, 503-390-7174, FAX 503-390-7443  
**Salt Lake City, UT** 800-441-2477, 801-978-0888, FAX 801-978-9099  
**Spokane, WA** 800-776-8771, 509-536-4097, FAX 509-535-1346