

Reversed HR-36™ Wall



Commercial and Industrial Wall Panels
26 & 29 Gauge

Featuring

Zincalume® For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

Reversed HR-36™ Wall is a through-fastened metal panel with 36" net coverage. Reversed HR-36™ Wall is predominantly used in industrial and light commercial applications.

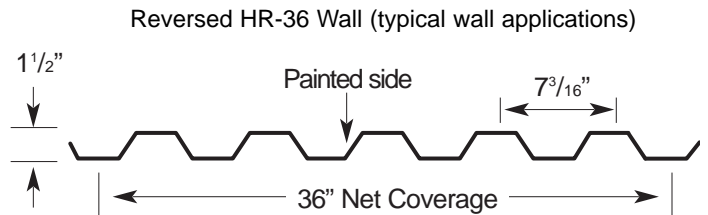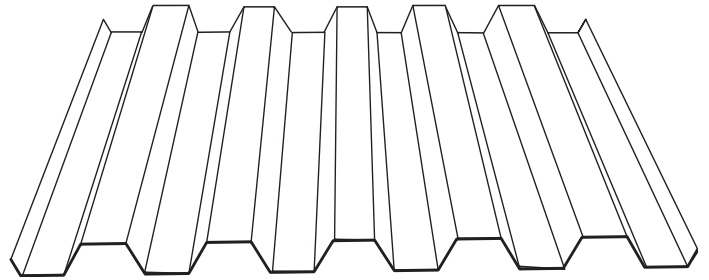

features | benefits

- Wider coverage means fewer panels to handle and install, saving time and money.
- Quick, economical trim packages available as standard trim pieces that can be ordered by number.
- High tensile steel panels in 26 gauge available with the DuraTech®*nt* coating system or Zincalume® Plus for unpainted applications.
- Exceptional value in high tensile steel 29 gauge panels coated with the ColorGuard™*xt* coating system. Choose from Surf White, Desert Beige, Lightstone or Zincalume® Plus for unpainted applications.
- Fiberglass panels are available to match the profile of the metal panels.

Reversed HR-36 Section Properties					
Gauge	Wt. (lbs/ft ²)	S+ (in ³ /ft)	I+ (in ⁴ /ft)	S- (in ³ /ft)	I- (in ⁴ /ft)
29	0.74	0.0549	0.0589	0.0618	0.0576
26	0.98	0.0839	0.0838	0.0895	0.0825

www.aepspan.com



Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791
Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625
Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394
Kernersville, NC 800-527-2503, 214-827-1740 FAX 214-828-1394