



# Light Gauge Klip-Rib®

Featuring

**Zincalume® For Twice the Life!**

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

**Klip-Rib®** is a performance rated structural standing seam panel system that snaps positively over concealed anchor clips for quick installation and exceptional strength. **Klip-Rib®** is the preferred panel for pre-engineered metal building systems.

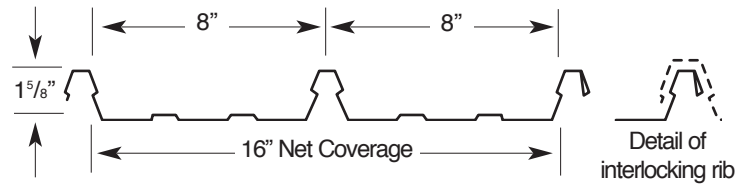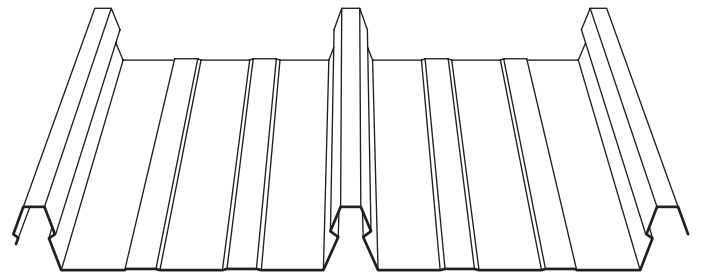

## features | benefits

- Klip-Rib® has been tested in accordance with UL580 and meets UL Class 60 wind uplift requirements.
- Has been tested for air infiltration per ASTM E1680, and water infiltration per ASTM E1646.
- Can be installed over solid substrates or spaced support members.
- Integral ribs have the bold appearance of a batten, but without separate snap-on battens. Preferred for high visibility applications with less likelihood of oil canning than panels with wide flat areas.
- Klip-Rib®'s locking seam reduces field labor by eliminating field seaming.
- Its patented 21-gauge clip engages two ribs and allows panels to be disengaged if needed.
- Can be installed on pitches as low as 1:12.
- Panels are stiff enough to be shipped without wooden crates. The stretch wrap packaging protects the panels from water and dirt and reduces job site waste.
- Readily available in Zincalume® Plus for unpainted applications, also available in variety of colors in the DuraTech® nt coating system.

Light Gauge Klip-Rib® Section Properties

| Gauge | Wt.<br>(lbs./ft. <sup>2</sup> ) | S+<br>(in. <sup>3</sup> /ft.) | I+<br>(in. <sup>4</sup> /ft.) | S-<br>(in. <sup>3</sup> /ft.) | I-<br>(in. <sup>4</sup> /ft.) |
|-------|---------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| 26    | 1.02                            | 0.0571                        | 0.0837                        | 0.0520                        | 0.0504                        |

[www.aepspan.com](http://www.aepspan.com)



Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791  
 Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625  
 Dallas, TX 800-527-2503, 214-827-1740, FAX 214-828-1394  
 Kernersville, NC 800-527-2503, 214-827-1740, FAX 214-828-1394