



# MultiLok-24™

Featuring

**Zincalume® For Twice the Life!**

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

**MultiLok-24™** is a structural standing seam roof system preferred for weathertight low slope applications. Multilok-24 uniquely offers three field-seaming options to suit the varying wind uplift requirements.

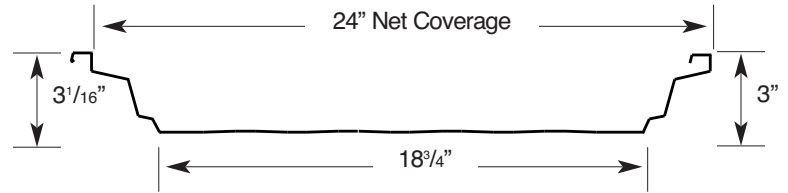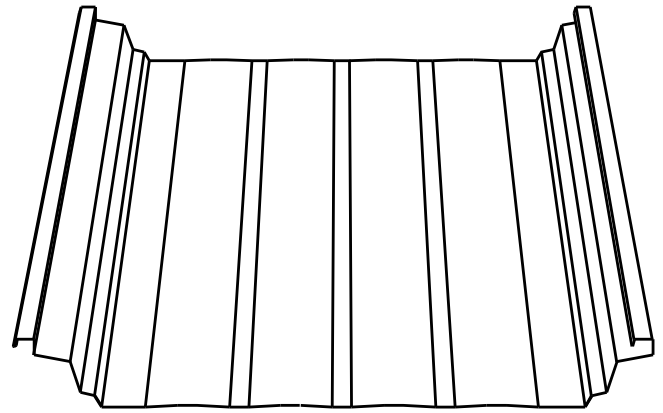

## features | benefits

- Weather-tight 3" - high standing seam with concealed clips and fasteners.
- Tested in accordance with ASTM E-1680 (air infiltration).
- Tested in accordance with ASTM E-1646 (water infiltration).
- Ideal for both new and retrofit construction.
- Has been tested in accordance with ASTM E1592 (wind uplift).
- Has been tested in accordance with UL580 and meets UL 90 wind uplift requirements.
- Floating roof clips allow for movement to accommodate thermal expansion on very long runs.
- Factory-applied seam and clip sealant assures quality control and a fast installation.
- Choose from three different seam configurations (RollLok, TripleLok, or QuadLok) depending on project requirements.
- MultiLok-24™ system includes trim and accessories.
- Guide Specifications and Installation, Flashing & Detail Guide available.

MultiLok-24™ Section Properties

Gauge	Wt. (lbs./ft. <sup>2</sup> )	S+ (in. <sup>3</sup> /ft.)	I+ (in. <sup>4</sup> /ft.)	S- (in. <sup>3</sup> /ft.)	I- (in. <sup>4</sup> /ft.)
24	1.17	0.1567	0.3739	0.0965	0.1577
22	1.44	0.1925	0.4587	0.1276	0.2025



Tacoma, WA 800-733-4955, 253-383-4955 FAX 253-272-0791  
 Fontana, CA 800-272-2466, 909-823-0401 FAX 909-823-2625  
 Dallas, TX 800-527-2503, 214-827-1740 FAX 214-828-1394  
 Kernersville, NC 800-527-2503, 214-827-1740 FAX 214-828-1394